

ROCKER SWITCH



Series : R8


DESCRIPTION :

Integral offers R8 series Rocker Switches designed with high quality reliable materials for high current carrying in a small volume.

These switches find a place in various instruments, electrical appliances, automotive and other commercial applications.



DIMENSIONS:

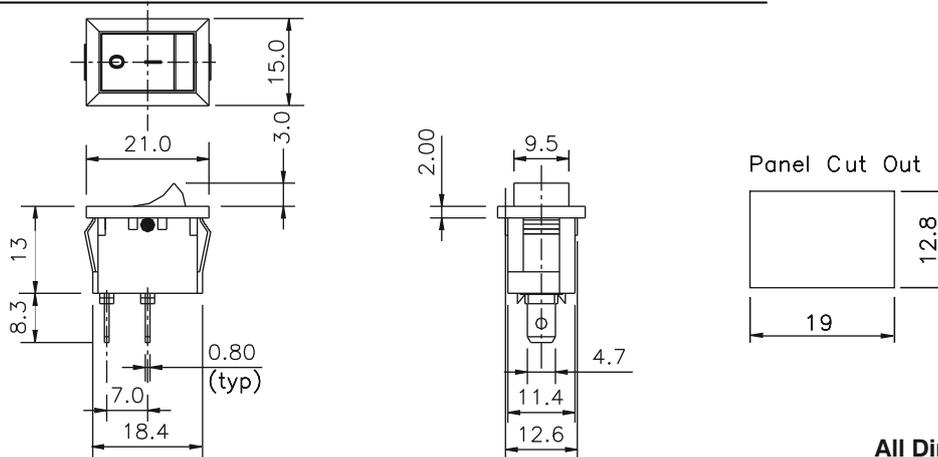

All Dimensions in mm.

SPECIFICATION:-

CONTACT RATING	: 6A (Resistive Load) @ 250 VAC / 30V DC
CONTACT RESISTANCE	: 50 m ohms (max) Initial
INSULATION RESISTANCE	: 100 M ohms (min) : @ 500V DC
DIELECTRIC STRENGTH	: AC 1500V (50/60Hz FOR 1 minute)
LIFE (ELECTRICAL)	: 20,000 Cycles @ Full load
OPERATING TEMP.	: -25 ⁰ + 85 ⁰ C
OPERATING FORCE	: 500 [±] 100 gms

MATERIALS & FINISHES

HOUSING & KNOB	: Nylon 66
CONTACTS	: Silver alloy
TERMINALS & ROCKER CONTACT	: Copper alloy, Silver plated
ACTUATOR	: Copper alloy, Nickel plated.
SPRING	: Spring Steel
BODY COLOUR	: Black
ACTUATOR COLOUR	: Red

For further details please contact :-



INTEGRAL SYSTEMS AND COMPONENTS PRIVATE LIMITED

D-388/1, 1st Block, 1st Stage, Peenya Industrial Estate, Bangalore - 560 058, India

Telefax: (080) 2839 1707 / 2839 1708 / 2839 1709 / 2839 1710

Website: www.integralsys.in **E-mail:** inty.systems@gmail.com / sales@integralsys.in

NA - 1